

BUTTERFLY VALVE GEAR OPER. FULL FLANGED TYPE



BF Series

旋轉凡而全法蘭齒輪式

BF 300

Size: 8"- 24"


*OPTION: 8"(DN200)Lever type.

● MATERIALS OF CONSTRUCTION

No.	Parts	Pcs.	Materials	No.	Parts	Pcs.	Materials
1	Body	1	UPVC, PP,CPVC, PPG, PVDF	11	Indicator Plate	1	UPVC
2	Seat	1	EPDM, VITON, NBR, HYPALON	12	Gear	1	FCD45
3	Disc	1	UPVC, PP,CPVC, PPG, PVDF	13	Oil Seal	1	EPDM
4	Disc O'ring(A)	2	EPDM, VITON	14	Bearing	1	SMCM220/420/810
5	Disc O'ring(B)	2	EPDM, VITON	15	Adjustable Bolt	2	SS41
6	Stem	1	SUS410, SUS304, SUS316	16	Gearing	1	SS41
7	Stem O'ring	2	EPDM, VITON	17	Set Pin	1	K7
8	Gear Box	1	FC25	18	Hand Wheel	1	FCD45
9	Gear Box Cap	1	FC25	19	Tightening Bolt	4	SCM3,SUS304
10	Side Cap	1	FC25				

● Torque Values (1kgf/m=9.8N.m)

BF-V'S Size	Torque Under Without Any Water Pressure (Kgf/m)	Under Water Testing Pressure(Kg/cm ²)			BF-V'S Size	Torque Under Without Any Water Pressure (Kgf/m)	Under Water Testing Pressure(Kg/cm ²)		
		Water Pressure(Kgf/cm ²)	Open Torque(Kgf/m)	Close Torque(Kgf/m)			Water Pressure(Kgf/cm ²)	Open Torque(Kgf/m)	Close Torque(Kgf/m)
2"	1.5	15	0.5	0.5	12"	27.0	6	14	18
2-1/2"	1.5	15	0.5	0.5	14"	37.0	6	25	28
3"	2.0	15	1	1.5	16"	42.0	—	—	—
4"	2.0	12	1	1.5	18"	52.0	—	—	—
5"	5.0	12	2.5	4.5	20"	65.0	—	—	—
6"	6.5	12	4	7	24"	76.0	—	—	—
8"	10.0	10	6	8.5					
10"	17.0	8	7	10					

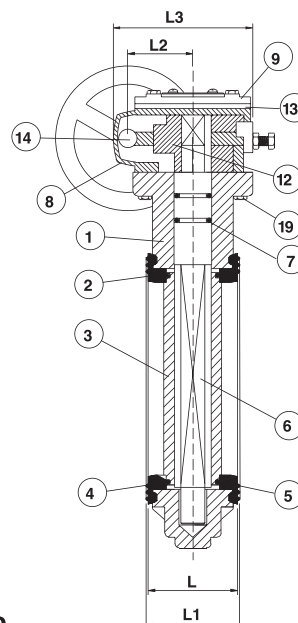

● DIMENSIONS TABLE

DIN																Unit: mm	
Nom. Size DN(inch)	D1	D2	n	øe	D3	L	L1	H1	H2	H3	K	L2	L3	D4	Test Press (bar)		Working Press (bar)
															Body	Seat	
200(8")	203	295	8	23	348	82	87	174	211.2	108	175	51	136	180	15.0	12.0	10.0
250(10")	255	350	12	25	412	102	108	206	242.7	83	195	51	136	180	15.0	12.0	10.0
300(12")	312	400	12	25	493	120	126	247	289	110	210	72	189	305	12.0	10.0	8.0
350(14")	355	460	16	25	540	123	129	270	305	110	210	72	189	305	10.5	8.5	7.0
400(16")	398	515	16	27	615	163	170	307.5	363	130	330	72	189	356	9.0	7.0	6.0
450(18")	451	565	20	27	640	175	182	325	365	130	330	116	285	406	9.0	6.0	5.0
500(20")	500	620	20	27	730	183	190	373	405	130	330	116	285	457	9.0	6.0	5.0
600(24")	600	725	20	30	844	205	218	435	460	175	350	116	285	508	7.5	6.0	5.0

74