




UPVC / CPVC PIPE FITTING VALVE

CLEAR PVC SCH40 PIPE

(美規40透明管)

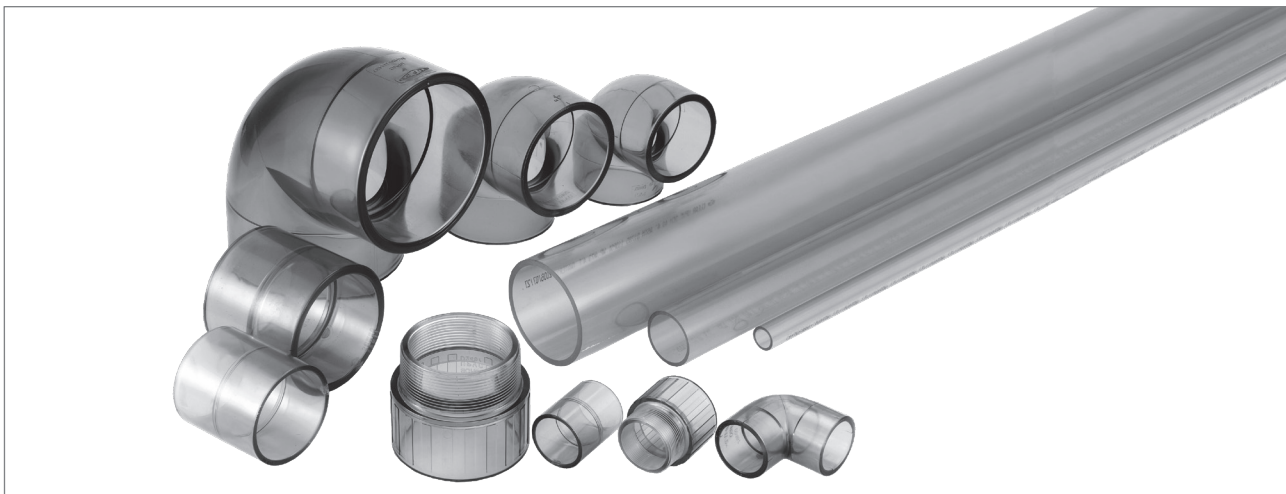

Dimensions and Pressure Ratings

單位 (unit) : inch

Nominal Pipe Size Size(in.)	O.D.	Average I.D.	Schedule 40		code
			Minimum Wall	Nominal Weight Lbs./ft	
1/2	0.840	0.608	0.109	0.161	12-PIO-04-0015
3/4	1.050	0.810	0.113	0.214	12-PIO-04-0020
1	1.315	1.033	0.133	0.315	12-PIO-04-0025
1-1/4	1.660	1.364	0.140	0.426	12-PIO-04-0032
1-1/2	1.900	1.592	0.145	0.509	12-PIO-04-0040
2	2.375	2.049	0.154	0.682	12-PIO-04-0050
2-1/2	2.875	2.445	0.203	1.076	12-PIO-04-0065
3	3.500	3.042	0.216	1.409	12-PIO-04-0080
4	4.500	3.998	0.237	2.006	12-PIO-04-0100
6	6.625	6.031	0.280	3.535	12-PIO-04-0150
8	8.625	7.943	0.322	5.305	12-PIO-04-0200
10	10.750	9.975	0.365	7.966	12-PIO-04-0250
12	12.750	11.889	0.406	10.534	12-PIO-04-0300

UPVC ECO CLEAR PIPE

(Thinwall)					code
	DIMENSION				
INCH	OD		Thickness		
		tolerance	min	tolerance	
1/2"	0.840	<u>±</u> 0.004	0.0826	+0.0197	12-PIO-DA-0015
3/4"	1.050	<u>±</u> 0.004	0.0826	+0.0197	12-PIO-DA-0020
1"	1.315	<u>±</u> 0.005	0.0980	+0.0197	12-PIO-DA-0025
1-1/4"	1.660	<u>±</u> 0.005	0.1102	+0.0197	12-PIO-DA-0032
1-1/2"	1.900	<u>±</u> 0.006	0.1181	+0.0197	12-PIO-DA-0040
2"	2.375	<u>±</u> 0.006	0.1378	+0.0197	12-PIO-DA-0050
2-1/2"	2.875	<u>±</u> 0.007	0.1654	+0.0236	12-PIO-DA-0065
3"	3.500	<u>±</u> 0.008	0.1850	+0.0236	12-PIO-DA-0080
4"	4.500	<u>±</u> 0.009	0.1969	+0.0276	12-PIO-DA-0100
6"	6.625	<u>±</u> 0.110	0.2283	+0.0394	12-PIO-DA-0150
8"	8.625	<u>±</u> 0.015	0.2677	+0.0394	12-PIO-DA-0200
10"	10.750	<u>±</u> 0.015	0.3150	+0.0591	12-PIO-DA-0250
12"	12.750	<u>±</u> 0.015	0.3150	+0.0591	12-PIO-DA-0300

* NOT CONFORM TO ASTM STANDARD
* NOT FOR USE WITH COMPRESSED AIR OR GAS