




PP-H/PP-H(FRP COATED) PIPE FITTING VALVE

PP-H REDUCED 45° Y-TEE

for butt welding
molded from PP-H
對接 45° Y型三通
DFP TY1

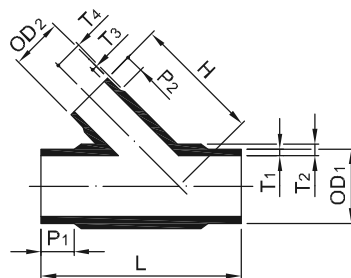


OD ₁ /OD ₂ (mm)	H (mm)	L (mm)	P ₁ (mm)	P ₂ (mm)	SDR17.6 ISO S8.3 PN6				Code
					T ₁ (mm)	T ₂ (mm)	T ₃ (mm)	T ₄ (mm)	
63-63	150	253	31	31	3.6	7.8	3.6	7.8	21-TY1-17-063063
90-63	153.53	242	53	31	5.1	11.1	3.6	7.8	21-TY1-17-090063
90-90	214	348	53	53	5.1	11.1	5.1	11.1	21-TY1-17-090090
110-63	172.50	273	65	31	6.3	13.1	3.6	7.8	21-TY1-17-110063
110-110	245	414	65	65	6.3	13.1	6.3	13.1	21-TY1-17-110110
160-110	265.05	374	84	65	9.1	15.8	6.3	13.0	21-TY1-17-160110
160-160	330	530	84	84	9.1	15.8	9.1	15.8	21-TY1-17-160160

OD ₁ /OD ₂ (mm)	H (mm)	L (mm)	P ₁ (mm)	P ₂ (mm)	SDR11 ISO S5 PN10				Code
					T ₁ (mm)	T ₂ (mm)	T ₃ (mm)	T ₄ (mm)	
63-63	150	253	31	31	6.0	10.0	6.0	10.0	21-TY1-11-063063
90-63	153.53	242	53	31	8.2	14.2	6.0	10.0	21-TY1-11-090063
90-90	214	348	53	53	8.5	14.2	8.5	14.2	21-TY1-11-090090
110-63	172.50	273	65	31	10.0	16.8	6.0	10.0	21-TY1-11-110063
110-90	207.35	316.25	65	53	10.0	16.8	8.5	14.2	21-TY1-11-110090
110-110	245	414	65	65	10.0	16.8	10.0	16.8	21-TY1-11-110110
160-90	248.04	356.50	84	53	14.6	21.3	8.3	14.2	21-TY1-11-160090
160-110	265.05	374	84	65	14.6	21.3	10.4	16.7	21-TY1-11-160110
160-160	330	530	84	84	14.6	21.3	14.6	21.3	21-TY1-17-160160

PP-H REDUCED 45° Y-TEE

(Fabricated)
for butt welding
molded from PP-H
手工 45° 異徑 Y 型三通
DFP TY6



OD ₁ /OD ₂ (mm)	H (mm)	L (mm)	SDR17.6 ISO S8.3 PN6		SDR11 ISO S5 PN10	
			Code	S ₁ /S ₂ (mm)	Code	S ₁ /S ₂ (mm)
110-32	174	262	28-TY6-110032-17.6	6.3/1.9	28-TY6-110032-11	10.0/3.0
110-40	178	273	28-TY6-110040-17.6	6.3/2.3	28-TY6-110040-11	10.0/3.7
110-50	183	287	28-TY6-110050-17.6	6.3/2.9	28-TY6-110050-11	10.0/4.6
110-75	195	323	28-TY6-110075-17.6	6.3/4.3	28-TY6-110075-11	10.0/6.9
125-40	198	300	28-TY6-125040-17.6	7.1/2.3	28-TY6-125040-11	11.4/3.7
125-50	203	314	28-TY6-125050-17.6	7.1/2.9	28-TY6-125050-11	11.4/4.6
125-63	220	333	28-TY6-125063-17.6	7.1/3.6	28-TY6-125063-11	11.4/5.8
125-75	216	350	28-TY6-125075-17.6	7.1/4.3	28-TY6-125075-11	11.4/6.9
125-90	223	371	28-TY6-125090-17.6	7.1/5.1	28-TY6-125090-11	11.4/8.2
125-110	233	399	28-TY6-125110-17.6	7.1/6.3	28-TY6-125110-11	11.4/10.0