





# PVDF/PVDF(FRP COATED)

## PIPE FITTING VALVE

### PVDF TEE

reinforced  
for butt welding  
molded from PVDF

對接正三通  
DFP TT1




OD (mm)	H (mm)	L (mm)	L <sub>1</sub> (mm)	L <sub>2</sub> (mm)	B (mm)	SDR33 ISO S16 PN10		SDR21 ISO S10 PN16	
						Code	S (mm)	Code	S (mm)
20	35.00	70.0	15.0	40.0	21.0	--	--	51-TT1-21-0020	1.9
25	40.00	80.0	15.0	50.0	26.0	--	--	51-TT1-21-0025	1.9
32	47.75	89.0	17.0	55.0	33.4	--	--	51-TT1-21-0032	2.4
40	50.00	101.5	15.0	71.5	42.0	--	--	51-TT1-21-0040	2.4
50	60.00	122.0	23.0	76.0	52.0	--	--	51-TT1-21-0050	3.0
63	75.50	150.0	27.0	96.0	65.0	51-TT1-33-0063	2.0	51-TT1-21-0063	3.0
75	87.50	176.0	28.0	120.0	76.8	51-TT1-33-0075	2.3	51-TT1-21-0075	3.6
90	91.75	182.0	32.5	117.0	93.5	51-TT1-33-0090	2.8	51-TT1-21-0090	4.3
110	110.5	217.5	34.5	148.5	114.0	51-TT1-33-0110	3.4	51-TT1-21-0110	5.3
125	119.5	239.0	35.0	169.0	133.0	51-TT1-33-0125	3.9	51-TT1-21-0125	6.0
140	126.0	252.0	35.0	182.0	150.0	51-TT1-33-0140	4.3	51-TT1-21-0140	6.7
160	137.0	274.0	35.0	204.0	170.0	51-TT1-33-0160	4.9	51-TT1-21-0160	7.7
180	158.5	317.0	35.0	247.0	190.0	51-TT1-33-0180	5.5	51-TT1-21-0180	8.6
200	168.0	336.0	35.0	266.0	210.0	51-TT1-33-0200	6.2	51-TT1-21-0200	9.6
225	170.0	340.0	40.0	260.0	235.0	51-TT1-33-0020	6.9	51-TT1-21-0020	10.8
250	209.0	418.0	45.0	328.0	262.0	51-TT1-33-0250	7.7	51-TT1-21-0250	11.9
280	257.0	514.0	70.0	374.0	284.0	51-TT1-33-0280	8.6	51-TT1-21-0280	13.4
315	275.0	550.0	70.0	410.0	331.0	51-TT1-33-0315	9.7	51-TT1-21-0315	15.0

### PVDF TEE

molded from PVDF  
(Fabricated)  
for butt welding

手工對接正三通  
DFP TT4

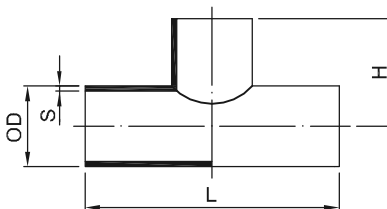

OD (mm)	H (mm)	L (mm)	SDR33 ISO S16 PN10		SDR21 ISO S10 PN16	
			Code	S (mm)	Code	S (mm)
355	160	675	51-TT4-33-0355	10.9	--	--
400	180	760	51-TT4-33-0400	12.3	--	--
450	200	850	51-TT4-33-0450	13.7	--	--
500	220	940	51-TT4-33-0500	15.2	--	--
560	240	1040	51-TT4-33-0560	17.0	--	--
630	250	1130	51-TT4-33-0630	19.1	--	--

手工製品(Fabricated)