




PVDF/PVDF(FRP COATED) PIPE FITTING VALVE

PVDF TEE

for socket welding
molded from PVDF

套接三通
DFP TT3

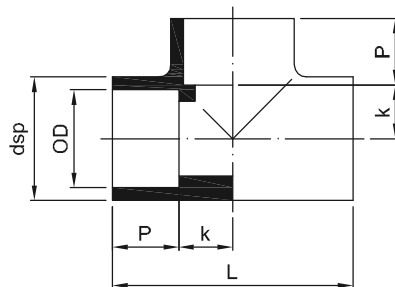


OD (mm)	dsp ^{±1} (mm)	k (mm)	P (mm)	L ^{±1} (mm)	SDR 7 PN20	
					Code	Weight (kg/Pc.)
16	24.0	12.30	14.6	53.8	51-TT3-07-0016	0.035
20	29.0	14.35	15.4	59.5	51-TT3-07-0020	0.052
25	34.8	16.55	17.2	67.5	51-TT3-07-0025	0.078
32	42.5	20.15	19.6	79.5	51-TT3-07-0032	0.122
40	51.6	25.60	21.2	93.6	51-TT3-07-0040	0.198
50	63.7	29.35	24.0	106.7	51-TT3-07-0050	0.316
63	80.0	33.70	27.8	123.0	51-TT3-07-0063	0.548
75	91.6	43.20	32.4	151.2	51-TT3-07-0075	0.814
90	111.7	54.25	37.0	182.5	51-TT3-07-0090	1.465
110	133.4	60.55	43.0	206.8	51-TT3-07-0110	1.930

PVDF SOCKET

for socket welding
molded from PVDF

平接頭
DFP CL2



OD (mm)	dsp ^{±1} (mm)	k ^{±1.5} (mm)	P (mm)	L ^{±1.5} (mm)	SDR 7 PN20	
					Code	Weight (kg/Pc.)
16	24.0	4.2	14.5	33.2	51-CL2-07-0016	0.016
20	28.9	4.0	15.5	35.0	51-CL2-07-0020	0.023
25	35.0	5.0	17.0	39.0	51-CL2-07-0025	0.035
32	43.0	4.0	19.5	43.5	51-CL2-07-0032	0.053
40	51.7	5.0	21.0	47.0	51-CL2-07-0040	0.077
50	63.7	5.0	24.0	53.0	51-CL2-07-0050	0.123
63	80.0	4.7	28.0	60.7	51-CL2-07-0063	0.221
75	91.0	5.5	32.5	69.5	51-CL2-07-0075	0.278
90	112.7	6.0	36.5	79.0	51-CL2-07-0090	0.532
110	132.5	6.8	42.5	91.8	51-CL2-07-0110	0.742