



BUTTERFLY VALVE (ELECTRIC ACTUATED TYPE)



BP Series

旋轉凡而（電動式）

BP300

Size: 2"- 14"

產品特性：


1. 馬力小，用電省，扭力大，控制角度到達自動切斷電源，保持在不用電的狀態，節約能源，降低成本。符合電壓 AC100V, 200V 單向，AV200V, 380V, 440V，三相，可供應。
2. 協羽旋轉凡而，設計簡單、質輕、堅固適用於空間有限，維修其短之場合。旋轉90即全開、全關，適用於調節流量，易磨損或黏稠性之流體，及抗酸、耐。
3. 開吞速度平穩，能消除管內水槌，增加管件壽命。馬達裝有溫度保護開關凡而如有異物卡住，馬達亦不會燒毀。
4. 機種多，可任選擇，有不附手動型或有附手動型，再停電時，可用手動操作開關。裝配附件少，只有一條電線即能完成自動控制，為你節省人力、物力、財力支出達到自動化目的。

Features of the Product:

1. Low horse power, low power consumption, big torsion power can be cut off automatically when control angle has been reached. It maintains at the condition of no power consumption to save energy and to reduce cost for conforming to AC110V, 220V single phase, AV 220V, 380V, 440V, 3 phase power supply.
2. they are simple, lightweight and compact, and are ideal for use where either space is limited or service and maintenance must be performed quickly. Because they require only 90° to fully open or close. Shie Yu Butterfly Valves are easily automated and are widely used as efficient throttling or flow regulating valves. Additionally, they are excellent for handling abrasive or slurry-type fluids. Of course, they are acid & alkali proof and anti-corrosion.
3. Starting speed is very stable and moisture in the pipeline can be discharged so that the service life of the pipe is increasing. The motor is equipped with temperature Protection switching valve to enable it not to be burnt out even seized with substance.
4. Various models are available for the choice of the customers. Manual control model and non-manual control model are also workable upon power outage, it can be switched manually. It is simple design with less fitting accessories. So, One electric wire can complete automatic control in order to save workmanship, materials, and money for the customers to attain the goal for automation.

● MATERIALS OF CONSTRUCTION

No.	Parts	Pcs.	Materials	No.	Parts	Pcs.	Materials
1	Body	1	UPVC, PP, PVDF, CPVC, PPG	6	Stem	1	SUS410/304/316
2	Seat	1	EPDM, VITON, NBR, HYPALON	7	Stem O'ring	2	EPDM, VITON
3	Disc	1	UPVC, PP, PVDF, CPVC, PPG	8	Electric Actuator	1	
4	Disc O'ring(A)	2	EPDM, VITON	9	Mounting Bracket	1	SUS304
5	Disc O'ring(B)	2	EPDM, VITON	10	Coupling	1	ZINC PLATED, CARBON STEEL

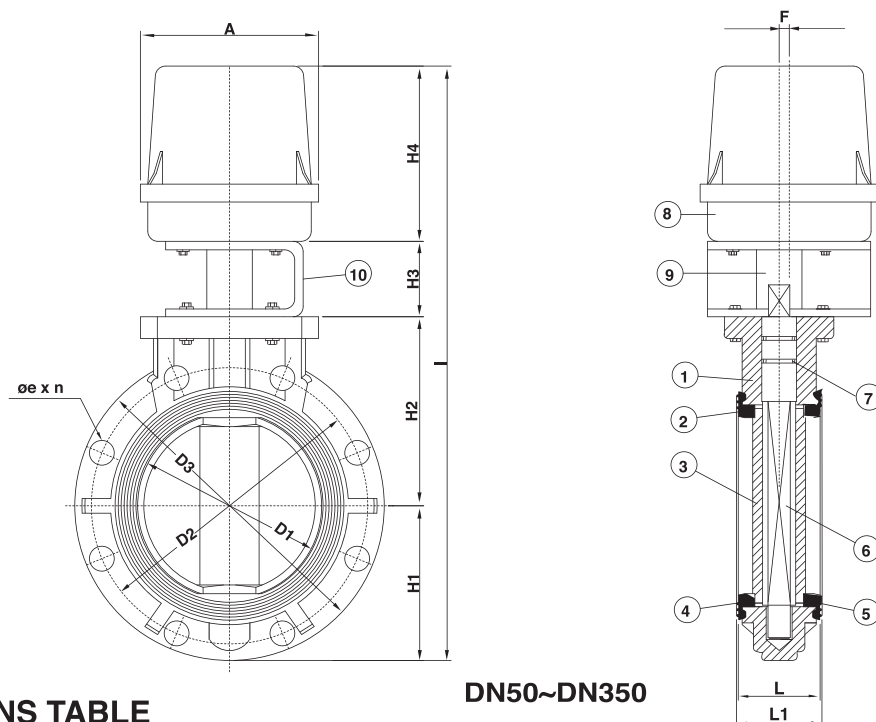

DN50~DN350

DIMENSIONS TABLE

JIS																		Unit: mm	
Nom. Size DN(inch)	D1	D2	D3	e	n No. of holes	L	L1	H1	H2	H3	H4	I	A	F	Test Press (kgf/cm ²)		Working Press (kgf/cm ²)	Allowed Voltage (W/A)	
															Body	Seat			
50(2")	55	120	164	19	4	36.1	43.5	82	107	61	145	391	150	28	15.0	12.0	10.0	110/220	
65(2-1/2")	69.6	140	185	19	4	40	46.4	92	115	61	145	408	150	28	15.0	12.0	10.0	110/220	
80(3")	78	150	196	19	8	40	47.4	98	123	61	145	424	150	28	15.0	12.0	10.0	110/220	
100(4")	100	175	225	19	8	48	52.4	112.5	139.5	61	145	455	150	28	15.0	12.0	10.0	110/220	
125(5")	128	210	254	23	8	51.2	58.8	127	160	61	145	493	150	28	15.0	12.0	10.0	110/220	
150(6")	152	240	286	23	8	51	57	143	178	71	200	593	190	23	15.0	12.0	10.0	110/220	
200(8")	200	290	344	23	12	61	67.5	172	212	71	200	643	190	23	15.0	12.0	10.0	110/220	
250(10")	255	350	412	25	12	102	108	206	242.7	71	200	706	190	23	15.0	12.0	10.0	110/220	
300(12")	312	400	493	25	16	120	126	247	289	71	200	799	190	23	10.5	8.5	7.0	110/220	
350(14")	355	460	540	25	16	123	129	270	305	71	200	835	190	23	10.5	8.5	7.0	110/220	

ANSI																Unit: inch		
Nom. Size DN(inch)	D1	D2	D3	e	n No. of holes	L	L1	H1	H2	H3	H4	I	A	F	Test Press (kgf/cm ²)		Working Press (lb/in ²)	Allowed Voltage (W/A)
															Body	Seat		
50(2")	2.16	4.75	6.46	0.75	4	1.42	1.71	3.23	4.21	2.36	5.71	15.39	5.91	1.10	225	180	150	110/220
65(2-1/2")	2.74	5.50	7.28	0.75	4	1.57	1.83	3.62	4.53	2.36	5.71	16.06	5.91	1.10	225	180	150	110/220
80(3")	3.07	6.00	7.72	0.75	4	1.57	1.87	3.86	4.84	2.36	5.71	16.69	5.91	1.10	225	180	150	110/220
100(4")	3.94	7.50	8.85	0.75	8	1.89	2.06	4.45	5.49	2.36	5.71	17.91	5.91	1.10	225	180	150	110/220
125(5")	5.04	8.50	10.00	0.87	8	2.02	2.31	5.00	6.30	2.36	5.71	19.41	5.91	1.10	225	180	150	110/220
150(6")	5.98	9.50	11.26	0.87	8	2.01	2.24	5.63	7.00	2.80	7.87	23.35	7.48	0.91	225	180	150	110/220
200(8")	7.87	11.75	13.54	0.87	8	2.40	2.66	6.67	8.35	2.80	7.87	35.31	7.48	0.91	225	180	150	110/220
250(10")	10.00	14.25	16.22	0.98	12	4.02	4.25	7.87	9.25	2.80	7.87	27.79	7.48	0.91	225	180	150	110/220
300(12")	12.28	17.00	19.41	0.98	12	4.72	4.96	9.41	11.38	2.80	7.87	31.46	7.48	0.91	155	125	105	110/220
350(14")	13.976	18.75	21.26	1.14	12	4.84	5.08	10.20	12.01	2.80	7.87	32.87	7.48	0.91	155	125	105	110/220

DIN																	Unit: mm	
Nom. Size DN(inch)	D1	D2	D3	e	n No. of holes	L	L1	H1	H2	H3	H4	I	A	F	Test Press (bar)		Working Press (bar)	Allowed Voltage (W/A)
															Body	Seat		
50(2")	55	125	164	18	4	36.1	43.5	82	107	61	145	391	150	28	15.0	12.0	10.0	110/220
65(2-1/2")	69.6	145	185	18	4	40.0	46.4	92	115	61	145	408	150	28	15.0	12.0	10.0	110/220
80(3")	78	160	196	18	8	40.0	47.4	98	123	61	145	424	150	28	15.0	12.0	10.0	110/220
100(4")	100	180	225	18	8	48.0	52.4	112.5	139.5	61	145	455	150	28	15.0	12.0	10.0	110/220
125(5")	128	210	254	18	8	51.2	58.8	127	160	61	145	493	150	28	15.0	12.0	10.0	110/220
150(6")	152	240	286	23	8	51	57.0	143	178	71	200	593	190	23	15.0	12.0	10.0	110/220
200(8")	200	295	344	23	8	61	67.5	172	212	71	200	643	190	23	15.0	12.0	10.0	110/220
250(10")	255	350	412	23	12	102	108	206	242.7	71	200	706	190	23	15.0	12.0	10.0	110/220
300(12")	312	400	493	23	12	120	126	247	289	71	200	799	190	23	10.5	8.5	7.0	110/220
350(14")	355	460	540	23	16	123	129	270	305	71	200	835	190	23	10.5	8.5	7.0	110/220

※ 法蘭長度公差依據 EN558-1:1995 標準

※ L 長度為安裝後建議參考值

※ Standard dimensions based on PVC material.

The flanged length tolerance is according to EN558-1:1995.

※ L : The suggested length of the valve as installed on pipeline.